

NOTES:
1. Operation Modes : Passive, Position, Gear, Velocity.
2. Tolerance for torque and power is ±10%.
3. Front Bearing: 3202-2RS Double row angular contact.
4. Pitch: 0.635 mm/rev.

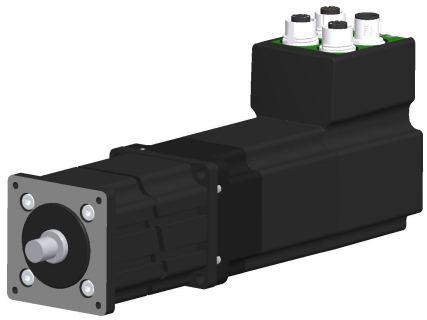

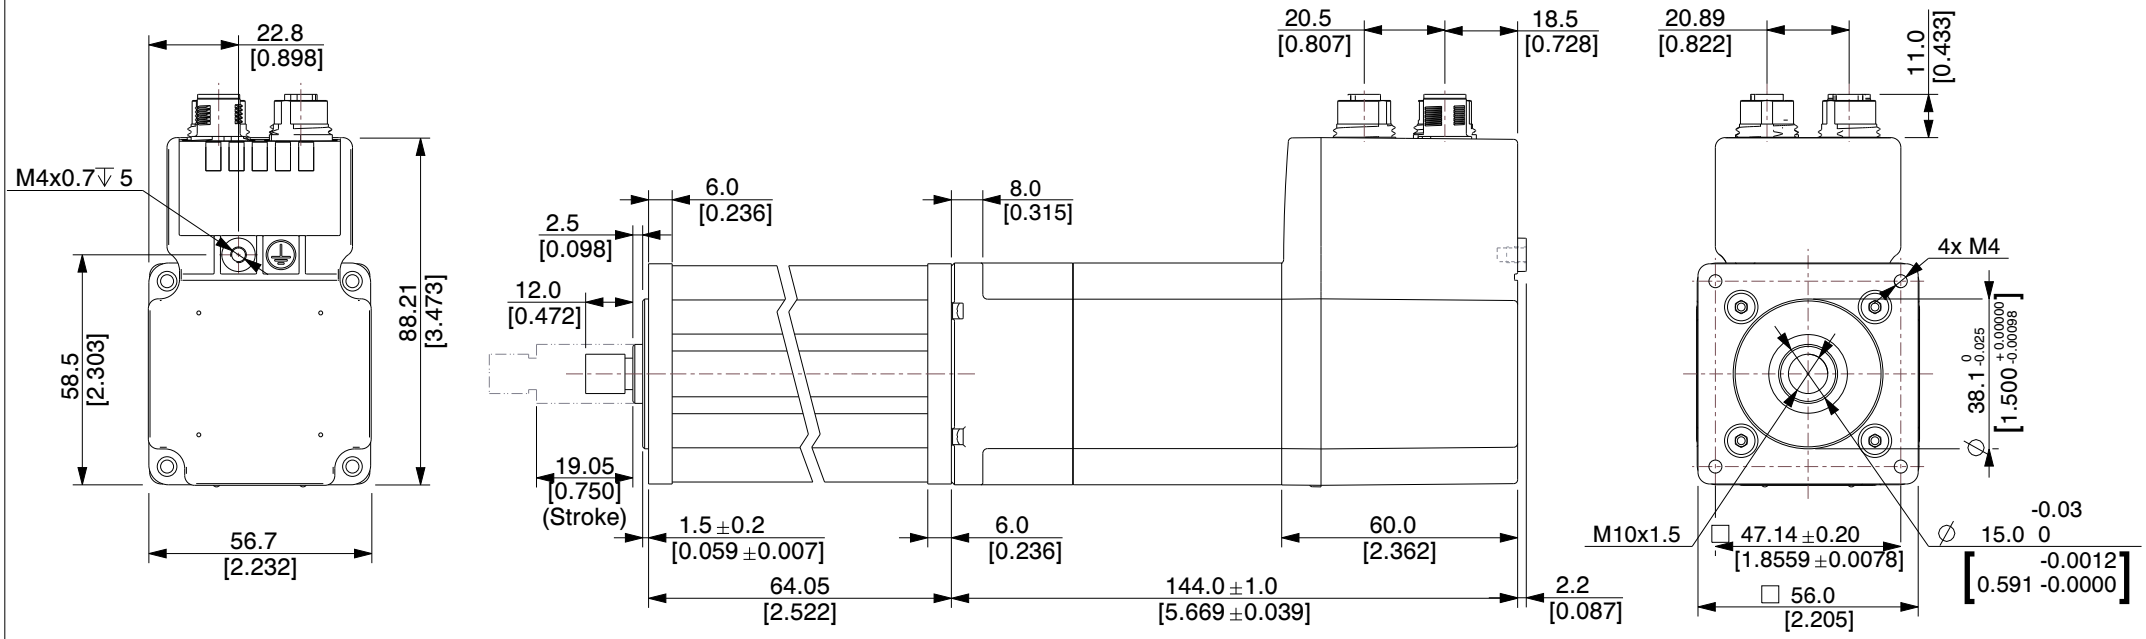

JVL A/S Bregnerødvej 127 DK-3460 Birkerød Denmark	JVL www.jvl.dk
PART NUMBER:	**MIL232SCA-EPH466B**
PART DESCRIPTION:	**Integrated Stepper Motor Linear Actuator**
A4	SCALE: NTS UNIT: MM [Inch]

Unless specifically stated otherwise, this drawing is the property of JVL A/S and no feature embodied herein may be disclosed except as previously authorized