


NOTES:

1. Operation Modes : Passive, Position, Gear, Velocity, Zero search mode type 1, type 2 and torque, Cyclic Synchronous Position mode (CSP)
2. Tolerance for torque and power is ±10%.
3. Shaft - AISI 303 Stainless steel.
4. Encoder Type: Internal, magnetic, absolute 1 rev. Closed loop ready. Resolution per rev.: 4096 counts / 1024 lines (quadrature output).

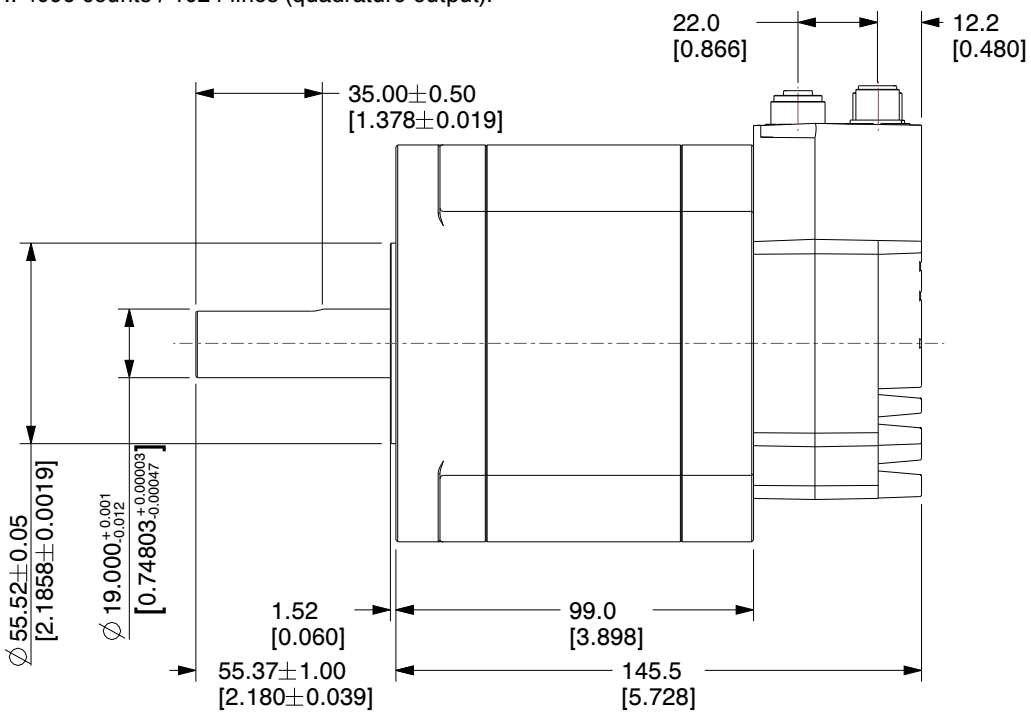

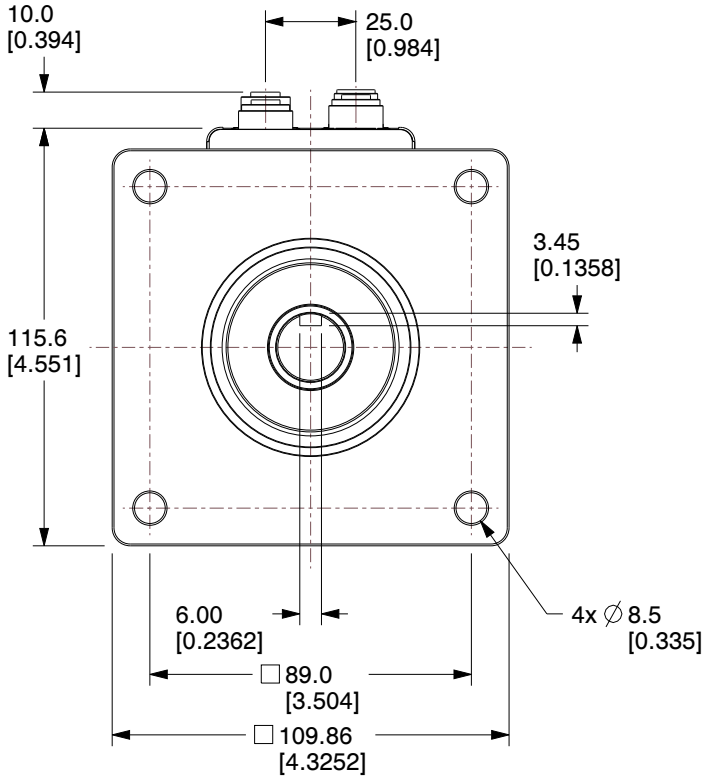

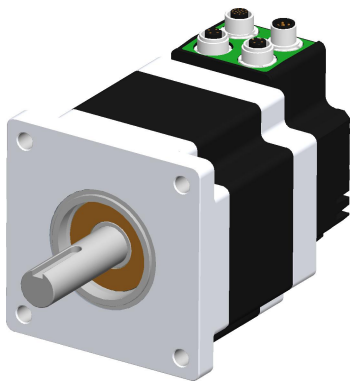

JVL A/S Bregnerødvej 127 DK-3460 Birkerød Denmark	JVL www.jvl.dk
PART NUMBER:	**MIS430C22EPH285**
PART DESCRIPTION:	**Integrated Stepper Motor**
A4	SCALE: NTS UNIT: MM [Inch]

Unless specifically stated otherwise, this drawing is the property of JVL A/S and no feature embodied herein may be disclosed except a s previously authorized